

Technical manual Mounting Instructions

KL1040

CHARACTERISTICS

The EuroLine Compact series was specially developed for safes which have two through holes, 100mm apart. The plastic housing of the EuroLine unit combines a key-hole escutcheon with a pull handle (metal). The 8x8mm square shaft of the pull handle drives the boltwork. The pictures show the most common usage but the unit can be fitted mirrored and also vertical.

DIMENSIONS / MOUNTING INSTRUCTIONS

The spindle hole should be maximum Ø: 11-13mm.

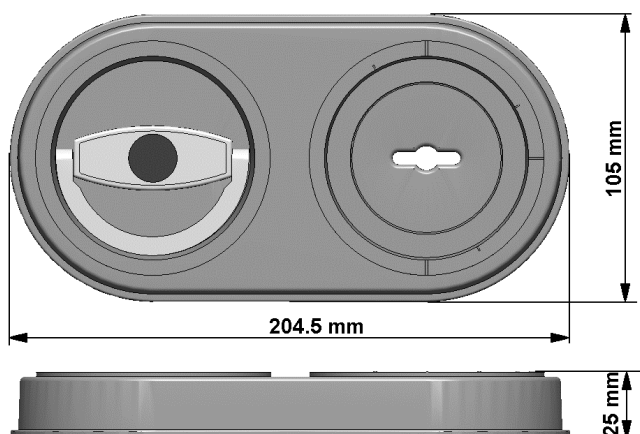


Fig. 1

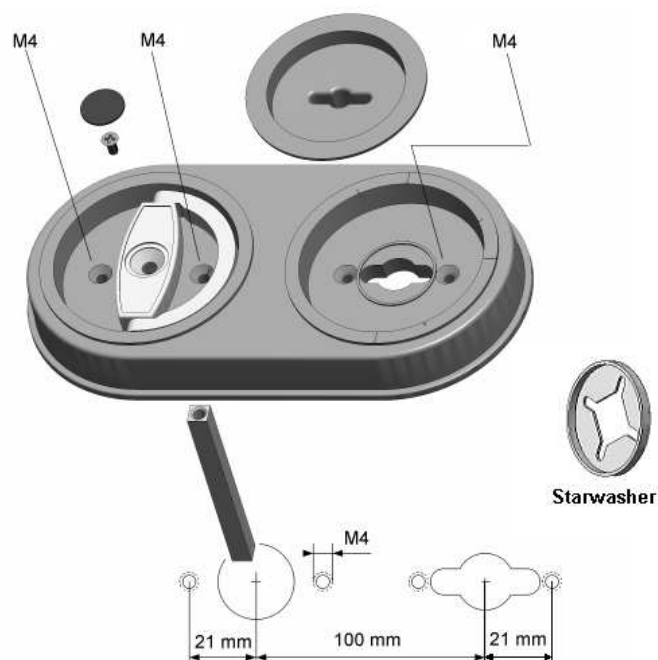


Fig. 2

Cut the 8 mm square shaft to an appropriate length making sure the shaft will extend into boltwork properly. Affix the shaft with the provided screw in the handle and cover the screw with the label. Push the shaft into the boltwork as shown in the picture on the right.

Lock and boltwork must be in the “OPEN” position.

Adjust position and mount the entry unit with 3x M4 or 8/32” flathead, countersunk screws (not included). In case of vertical mounting we suggest to use one-way security screws.